

## Water Tank Strap Assembly Instructions


1. Loop strap around lifting bail as shown.



2. Insert strap into lower slot of plastic slide as shown.



3. Insert strap into upper slot of plastic slide as shown.

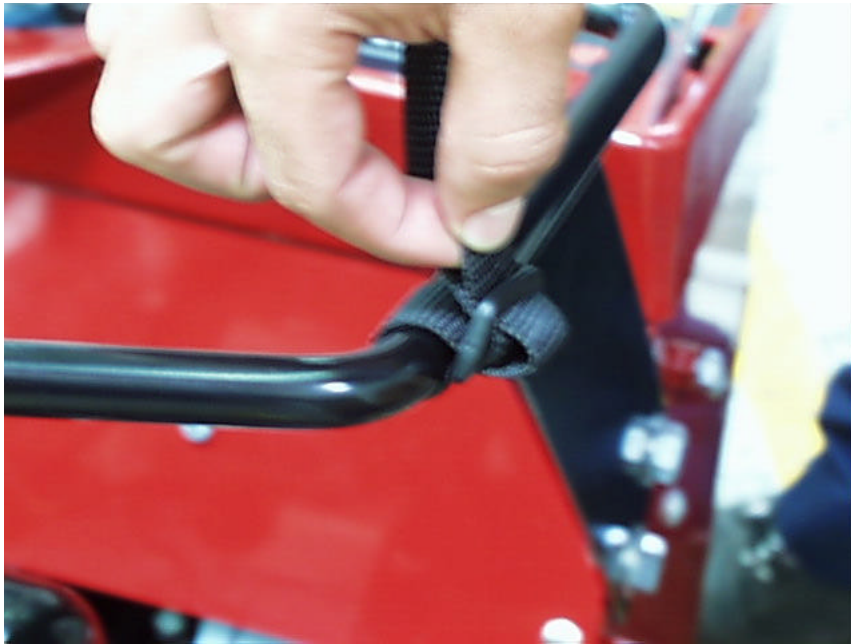

4. Pull strap and adjust to leave approx 1" of strap extending from upper slot.



5. Install water tank and buckle strap. Adjust by pulling slack after buckling. When removing water tank it is necessary to give buckle slack and re-adjust when buckling

