
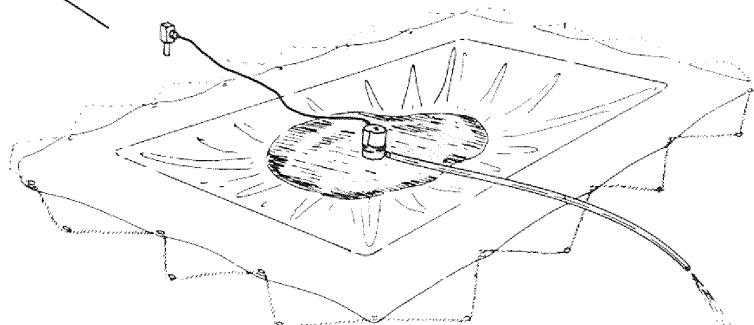


IMPORTANT

(Read Carefully)

For Better Service and Longer Life



**MODEL NO. PCPK-N
CATALOG NO. 574027
VOLTS 115**

The Little Giant Pump which you have just purchased is of the highest quality workmanship and material. It has been engineered to give you long and trouble-free service. Like any other piece of mechanical equipment, a little attention will help keep it in perfect operating condition.

Information and Suggestions:

- 1) Your unit is filled with oil. It does not need to be lubricated, ever.
- 2) Do not connect this pump to other than voltage stamped on the pump.
- 3) Do not let this unit operate dry. When the water has been removed from the Swimming Pool Cover, be sure that the pump is turned off.
- 4) Do not allow water to freeze inside volute.
- 5) Typical installation using tubing: Slide hose clamp over tubing and slip tubing over pump discharge. Tighten clamp.

Typical installation using garden hose: Assemble garden hose adapter to discharge of pump. Assemble garden hose to adapter and tighten.

NOTE: a 90° 1/4 x 1/4 elbow is supplied as standard equipment with pump. This elbow should not be used in pool cover applications.

This Water Removal Pump is designed to remove water that has accumulated on Swimming Pool Covers. The pump is provided with an 18 ft. cord and in the Kit, we have supplied 25 ft. of plastic tubing and a hose clamp which should be used when attaching the hose to the pump discharge. The pump should be plugged into an electrical outlet. **If this is not available and an extension cord is used, make certain that the connection between the pump and the extension cord is not pulled into the water.**

The pump should be run in an upright position. In order to mount the pump in the center of the cover and to place the pump in an upright position, it may require two people to install the pump; one to hold the electrical cord on one side of the pool, the other person to take the end of the 25 ft. hose and go to the other side of the pool. This way, the pump can be centered in the pool of water in an upright position.

Suggestion: If the pump is used in an area where there is excessive debris, leaves, dirt, etc., the pump can be inserted into a nylon stocking which makes an ideal filter for the pump. This keeps the debris and trash from being sucked into the pumping head, which may jam the impeller. Should this happen, the base plate and pumping head are very easily removed with only the aid of an Allen wrench.

This pump is warranted to be in perfect condition when it leaves our factory. It is fully warranted against defective materials or workmanship for a period of one year from date of installation. Any unit which should fail for either reason will be repaired or replaced if returned prepaid to our factory, F.O.B. Oklahoma City, Oklahoma.

Little Giant

P.O. Box 12010

Oklahoma City, OK 73157-2010
(405)947-2511 • Fax: (405) 947-8720